

## hpm-f Typ1 / Typ2 VESA Adapter

# Assembly instructions

The VESA adapter is compatible with the following products from hp (hp.com):  
**M22F, M24F, M27f.**

The VESA adapter allows you to conveniently mount your HP brand monitor to a monitor arm with a VESA hole pattern (**75 x 75mm**). Use the included screws and nuts.

If you want to mount your VESA adapter directly to the wall, use suitable screws and dowels (*not included*).



# Assembly instruction

## Step 1

Remove the base of your monitor.

## Step 2

Mount the adapter to the VESA connector of your monitor arm or directly to the wall. (Figure 1)

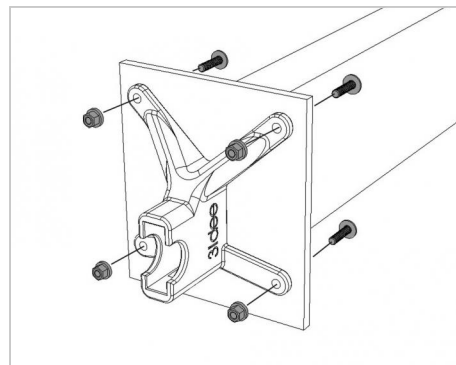


Figure 1

## Step 3

Plug the monitor onto the adapter so that it audibly clicks into place. (Figure 2)

**Hint: Apply some pressure if necessary!**

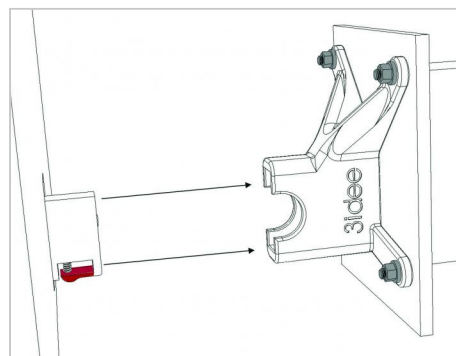


Figure 2

## Step 4

Make sure the monitor is properly snapped into the adapter.  
(Figure 3)

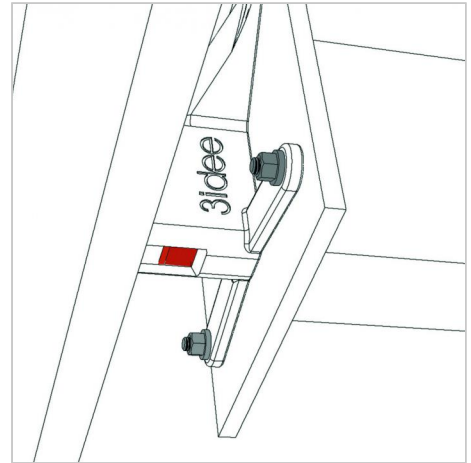


Figure 3

# Safety instructions

## General notes

- Make sure that all screws are tight and that the monitor audibly clicks into place during installation (if available).
- The material of the adapter is not heat resistant. Avoid direct heat around the adapter such as PC exhaust or direct sunlight in summer.
- PLA is UV resistant but not suitable for high temperatures.
- Avoid jerky movements (pulling, tearing) on the PC monitor. This can affect the performance of the VESA adapter.
- Do not subject the PC monitor to excessive loads such as leaning or pushing. This can impair the performance of the VESA adapter.

## Material Notes

The adapter is made of high-quality polylactide (**PLA**) plastic. PLA is both a colorfast and UV-resistant material and has low flammability. Polylactide has a low temperature resistance of approx. **45°C-55°C** and is therefore not suitable for use in the vicinity of direct heat and heat sources.

We wish you a lot of fun with your product.

Your 3idee Team

### Responsible for this content:

**3idee Technologies S.à r.l**

**5, ZA Um Lenster Bierg  
L-6125 Junglinster  
Luxembourg**