

ass-vz VESA adapter (V3)

Assembly instructions

This VESA adapter is compatible with the following ASUS brand monitors :

V229, VX228H, VX229H, VX238H, VX248H, VX24AH, VX279, VX279Q, VZ239HE, VZ249HE, VZ279H, VZ279HE, VZ27AQ

WARNING

To minimize the risk of injury, it is important to read all instructions carefully before installation. We accept no liability for personal injury or property damage resulting from improper use of this product. Also, be sure to observe the technical specifications of the product.

- 1.** Read all instructions thoroughly.
- 2.** Incorrect installation can lead to damage or serious injury. Make sure that the product and the monitor are securely mounted before you use it.
- 3.** Ensure that the bracket to which the product is attached can easily carry the total weight of the monitor, computer, and adapter.



Technical Specifications

- **Maximum monitor weight:** 7 kg / 15.4 lbs
- **VESA standard compatibility:** 75x75 mm
- **Material:** plastic
- **Pivot angle:** not compatible
- **Maximum operating temperature:** 35°C / 95°F
- **Maximum ambient temperature:** 35°C / 95°F

WARNING

Exceeding the maximum load capacity, operating temperature or ambient temperature can lead to serious injury or damage.

Important Safeguards



Please read this manual carefully and keep it for future reference. If you pass the product on to third parties, this manual should always be included. Ignoring these instructions may result in injuries or damage to people and products, for which we cannot accept any liability.

IMPORTANT - KEEP FOR FUTURE REFERENCE.

- The use of this product should always be in accordance with the specified safety instructions.
- Do not install your VESA adapter in combination with the monitor in places where people are located below.
- Do not exceed the maximum weight of the compatible monitor models, as this may result in serious injuries or property damage.
- Pay attention to the maximum ambient temperature of 35°C when using the product.
- Do not mount the VESA adapter near a heat source or in direct sunlight, as this may cause the adapter to overheat.
- Check if your mounting point (e.g., monitor arm) can support the weight of the monitor with the VESA adapter.
- The product is designed exclusively for mounting with a hole pattern of 75x75 / 100x100mm / 200x200mm.
- After installing the VESA adapter, the position of the monitor must be readjusted to ensure proper ergonomics.

WARNING

Ensure that the device is turned off and disconnected from the power supply before installation to avoid possible injuries or damage.

1. Before First Use

Check the product carefully for possible transport damage and for the absence of accessories, such as screws, which should be included in the scope of delivery.

CAUTION

Make sure that packaging materials and small screws and parts contained therein are inaccessible to children to minimize the risk of choking and other risks.

2. Maintenance and Cleaning

2.1 Maintenance

- It is recommended to check every three months that all screws are still tight. Also, regularly check the condition of all components of the product.
- Store the product in a cool and safe place, ideally at a maximum storage temperature of 40°C. For additional safety, keep the product away from children and preferably in its original packaging.
- Avoid any vibrations and shocks so as not to affect the life and functionality of the product.

2.2 Cleaning

- No corrosive or hot cleaning agents should be used to clean the product. Likewise, wire brushes, metal or other sharp materials are unsuitable for cleaning and should not be used.
- For gentle and effective cleaning, the use of a soft, damp cloth is recommended.

3. Waste Disposal

For the disposal of this product we recommend to contact the responsible local authorities or disposal services. They can provide you with detailed information on available disposal options and recycling centers in your area.

4. Manufacturer Information

3idee S.à r.l.
19 Rue de Bitbourg
L-1273 Luxembourg
Luxembourg


mail: info@3idee.eu

5. Help and Feedback


If you need help with your article, we are here for you. We also appreciate any feedback.

<https://help.3idee.eu/en/contact>

Scope of Delivery Accessories



4x M4x14 Crosshead Screw (SP6 or SP2)



1x M6x25 Crosshead Screw (SP6)



1x ass-vz Connector



1x ass-vx Connector



1x ass-vxhe Connector

⚠ NOTE: Please check before assembly whether all parts of the accessory are complete. If something is missing, please contact our customer service immediately by email or phone. We are happy to help.

Horizontal / Vertical Alignment

Not all VESA adapters and monitors are suitable for vertical alignment. (upright)
This is due to the geometry of the adapter / monitor, which is sometimes not otherwise feasible.
We would like to point out that this information should not be disregarded under any circumstances, as the adapter will very quickly reach its durability limit if the mounting is not specified.


We always try to develop monitors for vertical (upright) mounting as well.

The standard orientation of a monitor is horizontal.

**Horizontal
Mounting: YES**



**Vertical
Mounting: NO**

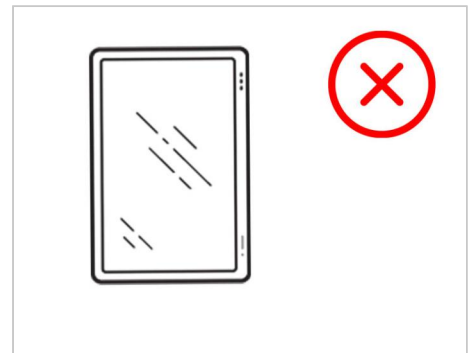

Assembly Instruction

Step 1

First, remove the base of your Asus monitor. To do this, loosen the screw under the monitor base. (Figure 1)

Please make sure you have a soft surface when storing the monitor for disassembly / assembly.

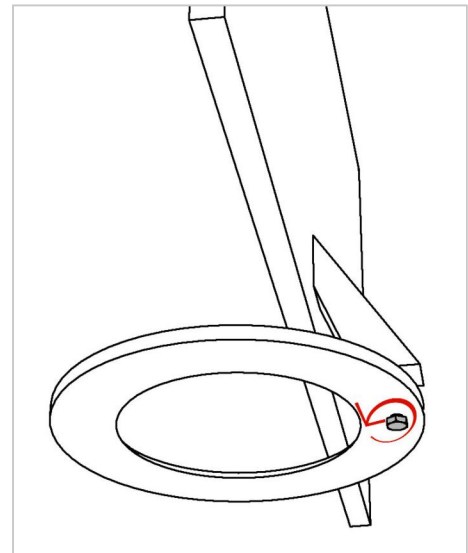


Figure 1

Step 2

This adapter works with various ASUS monitors. There are different connectors you can use. Choose the one that fits your monitor. In the next step, select the appropriate connector. (Figure 2)

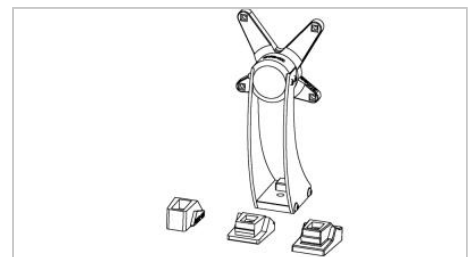


Figure 2

Step 3

Check which of the 3 connectors fits your ASUS monitor. (Figure 3)

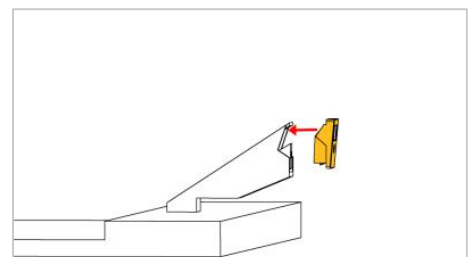


Figure 3

Step 4

Plug the ASUS VESA adapter onto the connector already in the base. Make sure the marked square snaps into place. (Figure 4)

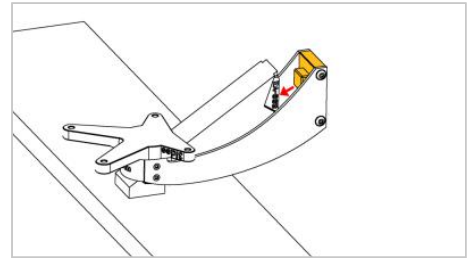


Figure 4

Step 5

Now tighten the VESA adapter with the supplied screw (**SP6**). (Figure 5)

Use a Phillips screwdriver for this.

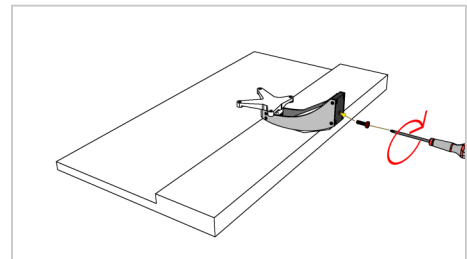


Figure 5

Step 6

This is how the attached VESA adapter should look on your Asus monitor. (Figure 6)

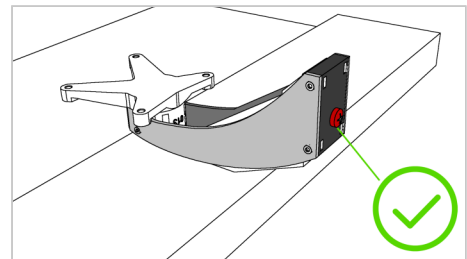


Figure 6

Step 7

⚠ NOTE: If the instructions in this step are not suitable for your device, please follow the mounting guidelines of the manufacturer of your monitor arm or swivel arm to mount the monitor to the wall or swivel arm.

We recommend a **second person** for this step.

Now lift the monitor and hold it against your monitor mount. Attach the VESA adapter using the 4 M4x14 screws supplied (**screw bag: SP6 or SP2**).

It is best to fasten 2 screws diagonally first so that the monitor can no longer fall down and you can fasten the remaining screws easily.

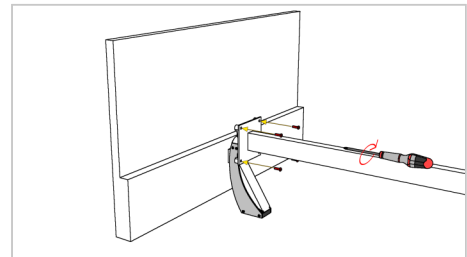


Figure 7

⚠ **NOTE:** Make sure you use the right screws!

(Figure 7)

Step 8

Please make sure that all 4 screws are tight. (Figure 8)

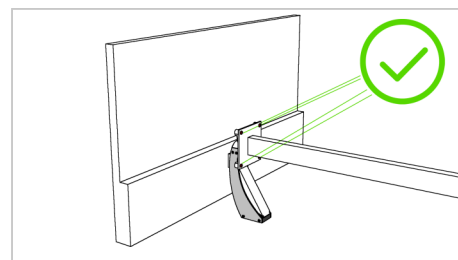


Figure 8